



WESTPORT ORANGE SHIPYARD LLC.

VAPOR TIGHTNESS TEST

Note: Test Result are valid for (1) one year from date of test

Vessel Name: GBL 3230 Test Date: 11/2/17
 Testing Location: WESTPORT SHIPYARD Maximum Load Rate: (BPH) 5,000
 Tanks Tested: 1, 2, 3 PORT + STBD Pressure Indicator: MANOMETER

TEST RESULTS

Test Duration: 30 minutes Beginning Pressure: 28.0 Inches H2O
 Ending Pressure: 27.7 Inches H2O
 Total Pressure Loss: 0.3 Inches H2O
 Allowable Pressure Loss: 2.37 Inches H2O

Barge is Vapor Tight if "Total Pressure Loss" is Less than "Allowable Pressure Loss"


This vessel has been tested in accordance with section 61.304F and has been found to be vapor tight.

CAMERON NEWETT


Tester (Print)



Tester (Signature)

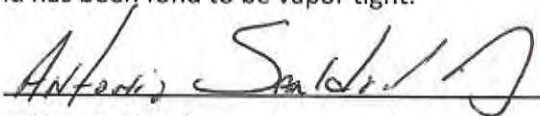

Witness: (Print)

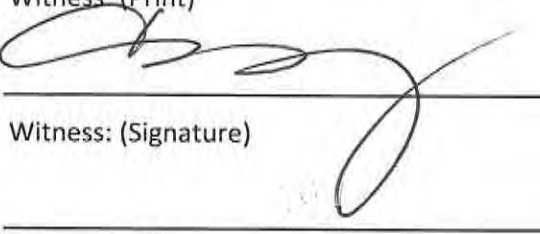

Witness: (Signature)

Affiliation of Witness:

(P1) - Beginning Pressure

(P2) - Ending Pressure

(Delta P) - Total Pressure Loss

(Delta PM) - Allowable Pressure Loss

(TP) - 14.7 plus Barge Test Pressure in PSI

(L) - Maximum Load Rate in BPH

(V) - Volume of Tank (s)

(Delta T) = Test Duration

0.861 - PIA @ (P1)

$$0.861 \times \frac{18.7}{(TP)} \times \left(\frac{4545}{(L)} \right) \div \left(\frac{32,000}{(V)} \right) = \frac{2.37}{(\text{Delta PM})}$$